

Jonathan Baert¹
Anissa Delepierre¹
Samuel Telek¹
Patrick Fickers¹
Dominique Toye²
Anne Delamotte²
Alvaro R. Lara³
Karim E. Jaén³
Guillermo Gosset⁴
Peter R. Jensen⁵
Frank Delvigne¹

¹Gembloux Agro-Bio Tech, Microbial Processes and Interactions (MiPI), University of Liège, Gembloux, Belgium

²Department of Chemical Engineering—Product, Environment and Processes (PEPs), University of Liège, Liège, Belgium

³Departamento de Procesos y Tecnología, Universidad Autónoma Metropolitana-Cuajimalpa, Col. Santa Fe, Cuajimalpa, México, D. F., Mexico

⁴Instituto de Biotecnología, Universidad Nacional Autónoma de México, Cuernavaca, Morelos, México

⁵National Food Institute, Technical University of Denmark (DTU), Lyngby, Denmark

Research Article

Microbial population heterogeneity versus bioreactor heterogeneity: Evaluation of Redox Sensor Green as an exogenous metabolic biosensor

Microbial heterogeneity in metabolic performances has attracted a lot of attention, considering its potential impact on industrial bioprocesses. However, little is known about the impact of extracellular perturbations (i.e. bioreactor heterogeneity) on cell-to-cell variability in metabolic performances (i.e. microbial population heterogeneity). In this work, we have evaluated the relevance of Redox Sensor Green (RSG) as an exogenous biosensor of metabolic activity at the single-cell level. RSG signal is proportional to the activity of the electron transport chain and its signal is strongly affected by metabolic burden, availability of electron final acceptor, and side metabolisms (i.e. overflow and mixed acid fermentation). RSG can also be used for the estimation of the impact of scale-down conditions on microbial metabolic robustness. The relationship linking averaged RSG activity and its cell-to-cell variability (noise) has been highlighted but seems unaffected by environmental perturbations.

Keywords: Biological noise / Flow cytometry / Phenotypic heterogeneity / Scale-down / Single cell



Additional supporting information may be found in the online version of this article at the publisher's web-site

Received: October 22, 2015; revised: April 28, 2016; accepted: June 15, 2016

DOI: 10.1002/elsc.201500149

1 Introduction

Bioreactor scale-up drives the appearance of gradients that are able to trigger significant physiological reactions at the level of the microbial population [1, 2]. Indeed, microbial cells are exposed to different microenvironmental conditions (i.e. pH, dissolved oxygen, nutrients, etc.) inside heterogeneous bioreactor

varying in amplitude with time and the specific location inside the bioreactor [3,4]. An important fundamental question at this level is to know whether environmental fluctuations typically found in large-scale bioreactor are able to drive phenotypic heterogeneity at the level of the microbial population [5]. In fact, cell-to-cell phenotypic variability is driven by two components, that is, an intrinsic source of noise resulting from stochasticity of reaction between molecular components, and an extrinsic source of noise resulting from variability in copy number of these molecular components [6,7]. This last component is notably influenced by the history of microenvironmental conditions met at the single-cell level and is thus strongly linked with bioreactor heterogeneities. The intrinsic component of noise is actually relatively well defined, with several modeling approaches relying

Correspondence: Frank Delvigne (F.Delvigne@ulg.ac.be), Gembloux Agro-Bio Tech, Microbial Processes and Interactions (MiPI), University of Liège, Passage des Déportés, 5030 Gembloux, Belgium
Abbreviations: RSG, Redox Sensor Green; SDR, scale-down reactor; V_{Hb}, *Vitreoscilla* hemoglobin

on stochastic equations for gene expression and protein synthesis [6]. However, little is known about the real influence of environmental factors on the extrinsic component of noise, and additional experiments are thus needed at this level [8]. For the remaining of this work, the terms stochasticity, noise, and phenotypic heterogeneity will be used in order to express cell-to-cell differences among the same population of microbes. These terms can be used in order to express the same phenomenon, but at different stages, that is, stochasticity in biochemical reactions induces the appearance of noise, which in turn is able to drive phenotypic heterogeneity among the microbial population. Besides its impact on gene expression and protein synthesis, phenotypic variability in metabolic performances recently attracted a lot of attention considering its potential impact on bioprocesses [9]. It has been notably shown that segregation in single-cell metabolic activities occurs upon shift in nutrient conditions, and more precisely upon shift from glycolytic to gluconeogenic carbon sources [10–12]. Since diauxic shift is likely to occur in standard process conditions (e.g. acetate is produced by *Escherichia coli* by overflow metabolism and can be consumed upon glucose limitation in fed-batch bioreactor), the occurrence of metabolic variability in heterogeneous bioreactors must be assessed. Different single-cell technologies are available for this purpose, including microfluidics cultivation devices [13] and flow cytometry [14]. These two techniques have pros and cons, that is, ease of use and automation for flow cytometry and spatial and time resolution of analysis in the case of single-cell microfluidic devices [9]. In the context of this work, effect of fluctuating environmental conditions was estimated in scale-down bioreactors, leading to the choice of flow cytometry as a single-cell method. Another important technical point is related to the design of efficient biosensing technologies for detecting the occurrence of microbial phenotypic heterogeneity [15, 16]. Genetically encoded biosensors based on the green fluorescent proteins have been widely used for the detection of microbial stress [17], the production of recombinant proteins [18], or the metabolic specialization of microbial cells [19]. However, the dynamic range of most of the green fluorescent proteins variants is not suitable for the detection of fast evolving processes [20, 21], such as metabolic related ones. An alternative to genetically encoded biosensors is to use exogenous biomarkers [22]. In the context of this work, cell-to-cell variability was estimated based on the use of an exogenous sensor, that is, Redox Sensor Green (RSG). RSG has been used as a vitality indicator so far, but we find out that its use would be extended to the detection of metabolic activities at a single-cell level. Indeed, RSG is reduced by the intracellular reductases involved in the aerobic metabolism [23], leading to the release of a green fluorescent compound that can be easily detected by flow cytometry. RSG could thus be considered as a key indicator of the metabolic state of the microbial cells in different bioprocessing conditions. Dynamic range of RSG will thus be first determined in standard well-mixed batch reactor, on the basis of wild-type strain and mutants showing either improved or decreased electron transport efficiencies. Upon validation, RSG will be used in order to decipher the occurrence of phenotypic heterogeneity in function of the external perturbations found in different scale-down reactor (SDR) setups. For this purpose, noise in RSG activity will be used as a proxy for expressing cell-to-cell differences in metabolic activity.

2 Material and methods

2.1 Strains and medium

All strains were maintained at -80°C in working seeds vials (2 mL) in solution with 40% of glycerol. Precultures and cultures were performed based on a defined mineral salt medium containing (in g/L): K_2HPO_4 , 14.6; $\text{NaH}_2\text{PO}_4 \cdot 2\text{H}_2\text{O}$, 3.6; Na_2SO_4 , 2; $(\text{NH}_4)_2\text{SO}_4$, 2.47; NH_4Cl , 0.5; $(\text{NH}_4)_2\text{-H-citrate}$, 1; glucose monohydrate, 10 (excepted for the scale-down experiments, where glucose monohydrate concentration was increased to 20 g/L); and thiamine 0.01. Thiamine is sterilized by filtration ($0.2\ \mu\text{m}$). The medium was supplemented with 3 mL/L of trace elements solution, 3 mL/L of a $\text{FeCl}_3 \cdot 6\text{H}_2\text{O}$ solution (16.7 g/L), 3 mL/L of an EDTA solution (20.1 g/L), and 2 mL/L of a MgSO_4 solution (120 g/L). The trace elements solution contains (in g/L): $\text{CoCl}_2 \cdot \text{H}_2\text{O}$, 0.74; $\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$, 0.18; $\text{MnSO}_4 \cdot \text{H}_2\text{O}$, 0.1; $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$; and $\text{CoSO}_4 \cdot 7\text{H}_2\text{O}$. In addition with the wild-type *E. coli* W3110, two genetically engineered strains were considered further for the analysis of the RSG activity. The first one was *E. coli* BL21 expressing *Vitreoscilla* hemoglobin (VHb). The chromosomal integration of the *Vitreoscilla stercoraria* hemoglobin gene (*vgb*) in *E. coli* BL21 (DE3) was performed following a protocol previously developed [24]. The *vgb* gene was amplified by PCR from plasmid pNKD1 [25] (donated by Prof. Benjamin Stark, Illinois Institute of Technology, USA). The PCR product (463 bp) was cloned into pCRII-Blunt-TOPO and subcloned in pLoxGentrc between the NcoI and HindIII sites to yield pLoxGentrc-*vgb*. In such construction, the start codon of the *vgb* gene is located downstream the *trc* promoter. The DNA region containing the *trc* promoter, *vgb*, and gentamicin-resistance genes flanked by Lox sequences was amplified by PCR from the pLoxGentrc-*vgb* plasmid. The resulting product containing 50 nt regions homologous to the genes *lacI* and *lacZ* was used to transform *E. coli* BL21 (DE3) bearing the plasmid pKD46, in which the Red system proteins were already induced with arabinose. This way, the PCR product was integrated into the chromosome by homologous recombination between *lacI* and *lacZ*. The integration was confirmed by resistance to Gentamicin by PCR amplification and subsequent sequencing of the PCR product.

The second strain was designed in order to investigate the effect of lowering the availability of ATP. *Escherichia coli* K12 MG1655 was used as the strain background for F1-ATPase expression. The strain was transformed with a plasmid pCP34::atpAGD (high ATPase activity) [26]. Briefly, the *atpAGD* operon from *E. coli*, encoding the soluble F1 part of the F1F0-ATPase (α , β , and γ subunits), has been inserted into the vector pAK80 under transcriptional control of a series of synthetic promoters.

2.2 Bioreactor operating conditions and scale-down setups

Before each bioreactor cultivation experiment, a precultivation step was performed in 100 mL based on the cultivation medium previously described. Precultivation was performed during 15 h in baffled shake flask at 37°C in orbital shaking incubator (Sanyo

IOX402.XX1.C) at 130 rounds per minute. For the batch experiments, cultures were performed in a Dasgip mini-bioreactor platform (DASGIP DASbox Reactor SR0250ODLS). This platform allowed the parallel cultivation of four microbial strains. Except for the scale-down setups, these mini bioreactors were filled with 200 mL of the defined medium described previously. All the bioreactors were inoculated with 10 mL of cellular suspension provided by the precultivation step in order to reach an initial OD ranging between 0.4 and 0.5. Mechanical stirring was provided by two Rushton turbines with six blades at an agitation rate of 1000/min. Air flow rate was maintained at 100 mL/min and the pH was kept at 7.0 during the whole culture. For the scale-down experiments, pH, temperature, and airflow rate remain unchanged except that the stirring rate was increased to 1300 rpm in order to avoid oxygen limitation. Furthermore, two different scale-down approaches were implemented for generating dissolved oxygen fluctuations. The first scale-down system consisted of a single stirred tank bioreactor operated in batch mode in which stirring was modulated according to an ON/OFF profile with duration of 1.25 and 1.80 min, respectively. The second scale-down system was based on two interconnected stirred tank bioreactors operated in batch mode. The first bioreactor was fully supplied in oxygen and filled with 220 mL of medium, whereas the second bioreactor was unaerated, stirred at 40 rpm for ensuring homogeneity in the vessel, and filled with 150 mL of medium. The continuous recirculation of the microbial cells between the two stirred tank reactors was performed with two external peristaltic pump. The first pump operated at a flow rate of 120 mL/min and the second pump operated at a flow rate of 200 mL/min, but the sampling rod depth ensures that the volume in the unaerated bioreactor remains constant at 150 mL. By this way, the average residence time spent by the microbial cells under dissolved oxygen limitation was comparable between the two SRD setups (results not shown).

2.3 Analytical techniques

Cellular density was measured by spectrophotometry at 600 nm using a Genesys 10S UV-Vis spectrophotometer (Thermo Scientific, Waltham, USA). Samples were previously diluted with phosphate buffer in order to obtain an absorbance ranging between 0.2 and 0.8. Glucose and acetate concentrations in the culture medium were determined using an Agilent 1200 series HPLC (Agilent Technologies) equipped with a Aminex HPX-87H column (Bio-RAD laboratories, Hercules, USA) preceded by a Supelguard H precolumn (Sigma-Aldrich, St. Louis, USA). The column were kept at a temperature of 40°C, and the isocratic mobile phase was 0.008N H₂SO₄ (in ultrapure, “milliQ,” water), at a flow rate of 0.6 mL/min. A refractive index signal detector, kept at 40°C, was used. This analysis took 40 min at a maximum pressure of 70 bar. Prior analysis samples were filtered with 25 mm CA Syringe Filters on a 0.22 μm filter (ROCC, Sart-Eustache, Belgium) and supplemented with sodium azide at a final concentration of 0.05%. Samples were stored at 10°C before analysis.

2.4 Flow cytometry and RSG staining

RSG normally enters cells and is reduced by reductase enzymes related to cellular respiration. However, little is known about the time required for the RSG to diffuse inside the cells and to be reduced. In order to determine the contact time required in order to obtain a stable signal by flow cytometry, real time flow cytometry has been used to characterize the kinetics of RSG reduction. For this purpose, samples taken at different growth stages during a batch culture of *E. coli* W3110 were analyzed. For all the cases, the time required in order to obtain a stable signal was around 24 ± 1 min (Supporting information File S1). Based on these elements, cells were systematically stained by adding 1 μL RSG (Invitrogen, UK) in 1 mL of cellular suspension and incubated during 25 min at 20°C. Prior to this step, the cellular suspension was diluted with PBS (pH = 7) for adjusting the cell density between 500 and 2500 events/μL during flow cytometry analysis. RSG's fluorescence was measured on the FL1 channel of a C6 Accury Flow Cytometer (BD Biosciences, NJ, USA). Each analysis was performed by analyzing 40 000 events (forward scatter threshold > 80,000; sheath fluid flow rate set to medium). The raw data were then extracted as .fcs files and loaded into MATLAB by using the readfsc function (by L. Balkay, University of Debrecen, Hungary, available on MATLAB central file sharing). The FL1 channel (green fluorescence) was processed in order to compute the median, the mean, and the SD of RSG intensity at the level of the microbial population.

3 Results and discussion

3.1 Evolution of RSG staining during batch bioreactor cultivation

As stated before, RSG has been used only in a few studies as a viability indicator, and its relevance as metabolic marker has not been fully assessed [23]. In order to assess the efficiency of RSG staining as an indicator of metabolic activity in process conditions, a first set of batch bioreactors of *E. coli* W3110 have been carried out (Fig. 1). The level of fluorescence attributed to RSG reduction increases during the main growth phase (Fig. 1A). During this phase, glucose consumption is accompanied with acetate excretion by overflow metabolism (Fig. 1B). When both substrates (i.e. glucose and acetate) are depleted, RSG signal drops rapidly and becomes very low when stationary phase of growth is reached. RSG signal seems thus to follow quite well the main metabolic transition during a batch culture of *E. coli* W3110 and could thus be used as an efficient metabolic tracer. Furthermore, it is interesting to notice that the level of RSG fluorescence is continuously increasing over time even after reaching the maximum growth rate. Indeed, RSG signal can only be correlated with the activity of the aerobic metabolic pathways. The increase of the fluorescence signal before the substrate depletion suggests a continuous increase of the electron transport capacity of the cells. On the other hand, the relative part of anaerobic metabolic pathways should decrease as a consequence. Therefore, it can be assumed that RSG analysis gives a relative insight on the carbon flux metabolized through the aerobic pathway in comparison with the carbon flux metabolized through

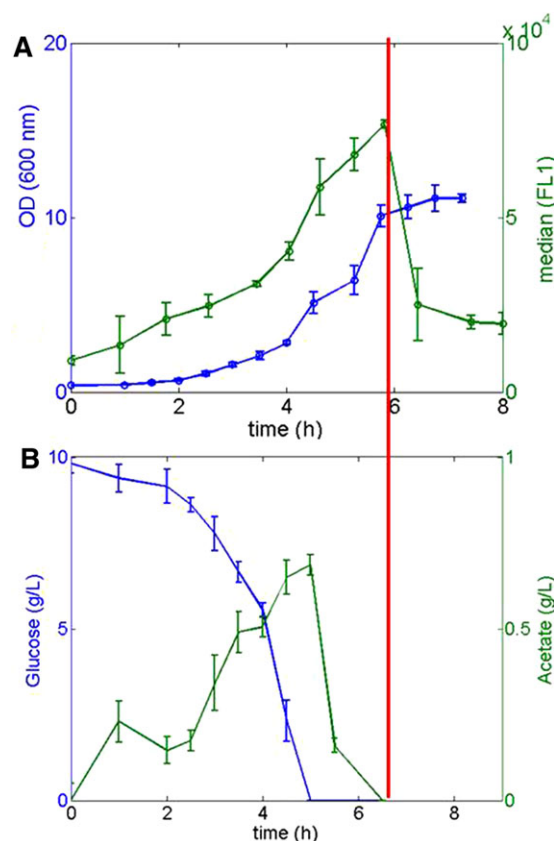


Figure 1. An evolution of the OD (at 600 nm) and the median of Redox Sensor Green (RSG) signal (computed from a population of 40,000 cells analyzed by flow cytometry) during the cultivation of *Escherichia coli* W3110 in batch bioreactor B evolution of the glucose and acetate concentrations.

fermentative pathway. It is important to point out that this first experiment has been carried out without any dissolved oxygen limitation. In the next section, the effect of dissolved oxygen limitation, as well as improved respiratory capacity and intrinsic metabolic burden, will be investigated.

3.2 Effect of enhanced respiratory capacity and metabolic burden on RSG activity

In order to further investigate the effect of external and internal factors on RSG signal, additional experiments involving dissolved oxygen limitation and mutants strains of *E. coli* have been carried out. In a first step, impact of dissolved oxygen limitation on *E. coli* W3110 and *E. coli* BL21 expressing the VHb was estimated (Fig. 2). It can be observed that *E. coli* W3110 rapidly drops at the level of the RSG signal when aeration is turned off during a batch culture (Fig. 2A). This observation is in accordance with the molecular mechanisms behind the generation of fluorescent signal from RSG. Indeed, when the final electron acceptor (oxygen) is depleted, activity of aerobic metabolic pathway is arrested and RSG can no longer be reduced. On the other hand, *E. coli* BL21 expressing VHb is able to maintain a strong fluorescent signal upon oxygen depletion (Fig. 2B). As stated previously,

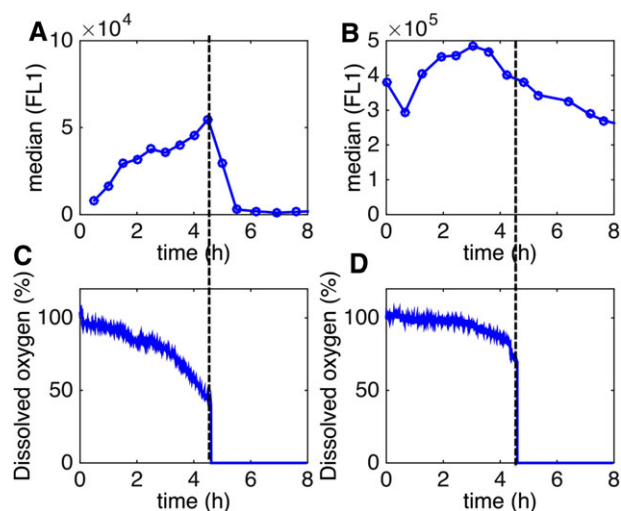


Figure 2. Effect of dissolved oxygen limitation on (A) the evolution of the median Redox Sensor Green (RSG) signal of *Escherichia coli* W3110, (B) the evolution of the median of the RSG signal for *E. coli* BL21 expressing VHb, (C) evolution of the dissolved oxygen concentration during the experiment involving *E. coli* W3110, and (D) evolution of the dissolved oxygen concentration during the experiment involving *E. coli* BL21 expressing VHb (aeration was stopped after 4.5 h of culture).

fluorescence emission of RSG is linked with the intracellular reductase activity, but a little is known about the metabolic role of these reductases and the biomolecular mechanism involved in the RSG response.

The expression vector was previously designed in order to increase VHb synthesis under fully aerobic conditions. It was shown that, in this case, overflow metabolism was reduced and plasmid DNA yield was increased [27,28]. VHb facilitates oxygen uptake from the media and delivers it to the cytochromes more efficiently, thus enhancing the electron transport chain activity. This mechanism tends to increase the robustness of the strain in front of dissolved oxygen fluctuations. But in fully anaerobic condition, VHb protein cannot improve the cellular aerobic metabolic activity. Nevertheless, the RSG response toward the VHb strain in both aerobic and anaerobic conditions were very helpful for deepening this issue. Indeed, as previously stated, the VHb protein plays a major role at the level on the electron transport chain activity in aerobic condition [28]. The RSG fluorescence for the VHb strain in aerobic conditions is strongly increased in comparison with the W3110 strain. But a fluorescence signal remaining high even in anaerobic conditions was not expected. This observation suggests that the VHb protein plays a major role in the RSG fluorescence emission. Therefore, for the VHb strain, the RSG response cannot be correlated to metabolic activity. Furthermore, previous studies stated that VHb protein itself harbors a terminal oxidase function [29], allowing the cellular growth on aerobic substrate of mutant lacking terminal oxidase [25]. Similarity between the oxidoreductive characteristics between the VHb protein and the terminal oxidase complex suggests that, apart for the VHb strain, the cytochrome complex is tightly implicated in the reaction required for the RSG fluorescence emission. At this stage we are able to propose a reactional

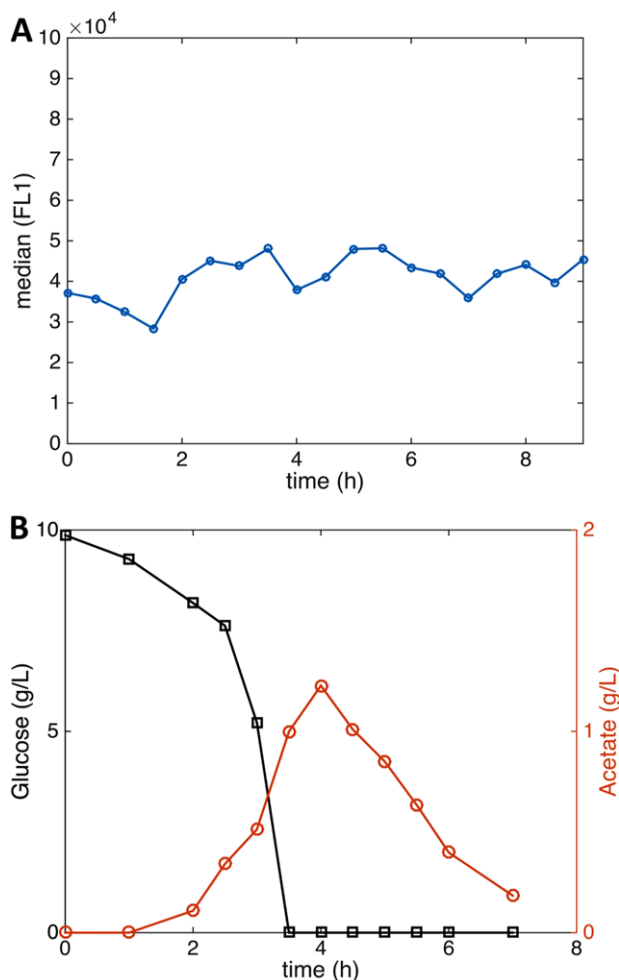


Figure 3. (A) Evolution of the median Redox Sensor Green (RSG) signal (computed from a population of 40 000 cells analyzed by flow cytometry) for *Escherichia coli* K12 MG1655 expressing F1-ATPase in batch bioreactor, (B) evolution of the glucose and acetate concentrations.

redox mechanism closely linked with the electron transport chain activity explaining how the RSG becomes fluorescent. We suggest that only the RSGs reduced form emitted green fluorescence and its intensity is proportional with its reduction state. Furthermore, the cytochrome complex seems to play a central role in this reduction reaction by transferring electron, initially provide by NADH reduction, to the RSG molecule. The greater is the electron flux through the electron transport chain, the higher will be the reduced state of the RSG molecule and the higher will be the fluorescence signal.

As a negative control, an *E. coli* strain expressing the F1-ATPase has been cultivated in batch mode and stained with RSG at different time intervals (Fig. 3). It can be observed that this strain exhibits a very low RSG signal during the whole culture (Fig. 3A). Indeed, expression of F1-ATPase is known to reduce the intracellular ATP concentration and increases significantly the glycolytic flux [26, 30]. Consequently, the excess of carbon flux through the aerobic metabolic pathways is diverted toward

the fermentative metabolism, as observed in our experimental conditions by the excretion of a large amount of acetate well known to be an overflow metabolite (Fig. 3B). In this case, it seems that a major part of the carbon flux is diverted to the acetate pathway, leading to a significant reduction of the aerobic metabolism activity that induced a reduction of the RSG fluorescence signal.

We have thus shown that artificially modifying the intracellular state of the cell leads to a decrease of this signal (i.e. in the case of the expression of the F1-ATPase). Since RSG signal can also be used for monitoring extracellular parameters, that is, either about the carbon source or the electron final acceptor availability, it should be interesting to determine whether fluctuations in environmental conditions are able to drive cell-to-cell heterogeneity in metabolic activity. This question will be addressed in Section 4.

4 Cell-to-cell heterogeneity in function of bioreactor heterogeneity

Phenotypic heterogeneity can be related to biological noise. This noise is typically measured on the basis of flow cytometry analysis of fluorescent reporter strains [31]. Results are typically represented as frequency distribution of fluorescence abundance among the microbial population. Noise can be calculated by taking the ratio of the SD to the mean of these distributions (i.e. this ratio corresponding to the CV) [32, 33]. This methodology has been further extended in this work by considering frequency distributions corresponding to the RSG fluorescence. The question that has to be addressed here is to know whether biological noise is enhanced or not by environmental noise generated in bioreactors, and more precisely noise related to dissolved oxygen fluctuations. Indeed, in this case, environmental fluctuations have an impact at the level of the extrinsic component of biological noise, leading to a potential increase of phenotypic heterogeneity.

As an attempt to make the link between biological noise and bioreactor heterogeneity, comparative scale-down experiments were further conducted to assess the reliability of RSG biosensors to report the effect of fluctuation of dissolved oxygen availability for *E. coli* W3110 grown on glucose base media (Fig. 4). The first culture was carried out in a standard stirred tank bioreactor without dissolved oxygen limitation. Two additional tests were carried out by considering two SDR setups based on different principle for the induction of dissolved oxygen fluctuations. In the single-compartment SDR, dissolved oxygen level was varying based on the modulation of the stirrer speed at a given frequency. In the two-compartment SDR, recirculation of the microbial cell between two stirred tank reactors with different oxygen transfer rates was considered. It is important to point out that the average residence between the two compartments of this setup match approximately the frequencies of exposure to dissolved oxygen limitation in the single-compartment SDR. Since these two setups are widely used in the literature [2], they can be considered as a good basis for estimating the impact of bioreactor heterogeneity on biological noise. Also, the mechanisms of cell exposure to dissolved oxygen limitation are fundamentally different between the two setups. Indeed, in the single-compartment SDR,

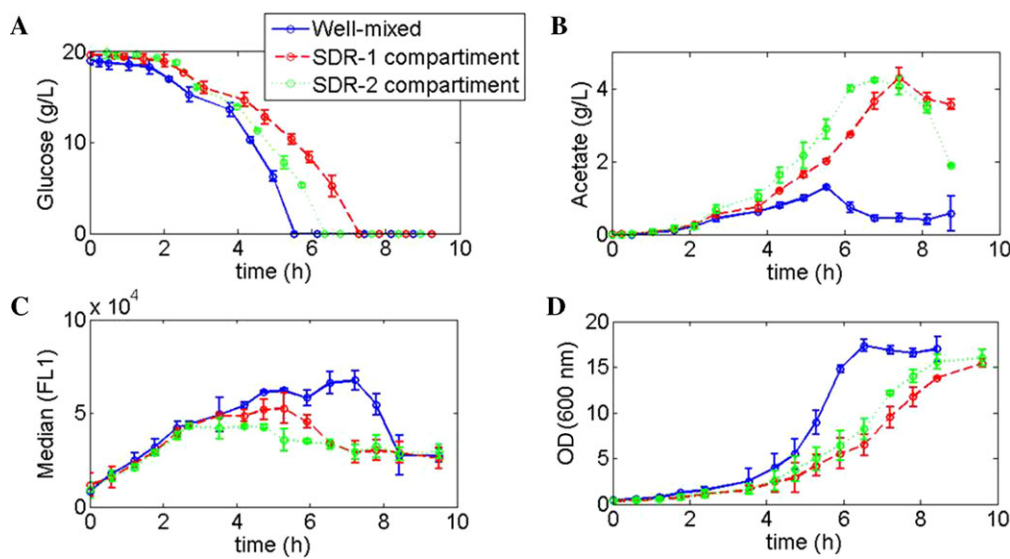


Figure 4. (A) Evolution of glucose and (B) acetate concentration for the three bioreactor setups. (C) Evolution of the median Redox Sensor Green (RSG) signal (computed from 40 000 microbial cells analyzed by flow cytometry). (D) Evolution of the OD at 600 nm for the three bioreactor setups.

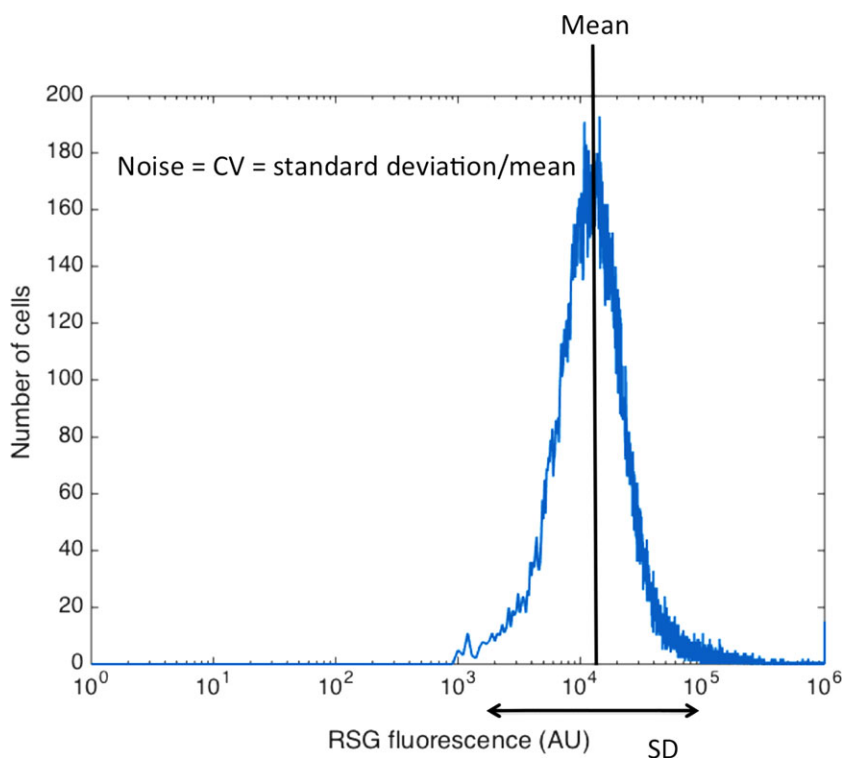


Figure 5. Distribution of RSG fluorescence among a population of 40 000 cells. Mean and SD are exploited for estimating noise.

each cells of the population are experiencing the same dissolved oxygen profile, whereas for the two-compartment SDR, cell-to-cell heterogeneity is higher since microbial cells are exposed to different dissolved oxygen profile according to the stochasticity of residence time in the respective compartments [34]. Comparison between the two SDR setups is thus very interesting for the evaluation of the extrinsic component of biological noise. The impact of scale-down conditions can be observed after 5 h of culture (Fig. 4). Indeed, higher acetate formation and lower growth rates are observed for the two SDR setups by comparison with the well-mixed reactor (Fig. 4A and D). Accordingly, the RSG

signal is also lowered in these SDR setups, indicating a drop of the metabolic activity (Fig. 4C). An explanation at this level is the deviation of the electron flux from the oxidative phosphorylation pathway to the mixed acid fermentation pathway [35], leading to a decrease of the global electron flux through the electron transport chain. An interesting feature at this level is that the results are not significantly different between the two SDR setups (no significant differences observed at the level of acetate production, biomass yield, and global RSG signal), suggesting that the mode of exposure of cells to dissolved oxygen, either stochastic or cyclic, has no strong influence. However, at this stage, only median RSG

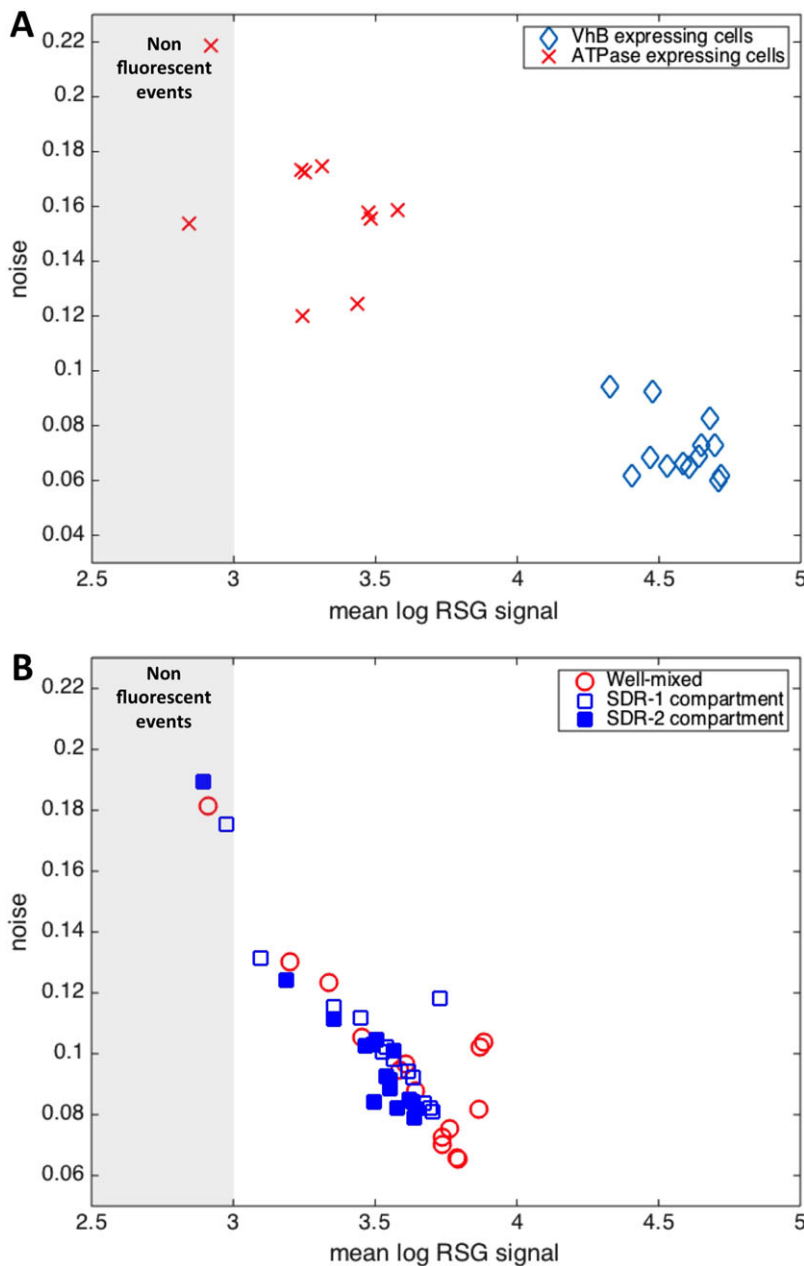


Figure 6. (A) Relationship between mean and noise of the Redox Sensor Green (RSG) signals for *Escherichia coli* strains expressing, respectively, F1-ATPase and VhB in. The gray shaded area corresponds to the nonfluorescent cells. (B) Relationship between mean and noise of the RSG signals corresponding to the cultivation of *E. coli* W3110 for the three operating conditions considered (i.e. well-mixed versus the two SDR conditions).

signal has been considered. As stated before, the interest of using flow cytometry relies on its ability to deliver information at the single-cell level, giving access to the estimation of biological noise. In this context, cell-to-cell heterogeneity is becoming an important feature for optimizing bioprocess performances, since recent works report an important effect of phenotypic heterogeneity on metabolic activity of microbial cell [9, 15]. However, the integration of phenotypic heterogeneity in the analysis of bioreactor performances is not a straightforward task [36]. For that purpose, we analyzed the mean to noise relationship of the RSG signal at the single-cell level for the different cell populations collected under different cultivation conditions. Indeed, it has been previously shown that protein expression scale with noise, with a general correlation showing that noise is reduced

when mean expression level increases. This correlation has been demonstrated for several microorganisms of industrial interest, such as *E. coli* [32] and *Saccharomyces cerevisiae* [37], and has also been recently validated in bioprocessing conditions [38]. More recently, it has been proposed to use noise as an experimental parameter as an estimate of the consequences of phenotypic heterogeneity [39].

For that purpose, we applied the measurement of noise to cell population stained with RSG (Fig. 5). In a first step, the results coming from the cultivation tests carried out with the *E. coli* strains expressing either VhB or ATPase have been processed in order to highlight the relationship between noise and mean RSG level (Fig. 6A). As expected for the ATPase expressing strain, the mean RSG signal was lower and the value of the noise was higher.

On the opposite, the VHb expressing strain exhibited high value of RSG intensity and a reduced amount of noise. The results coming from the scale-down experiments were further analyzed by using the same procedure (Fig. 6B). The scale-down effect leads to a reduction of the mean RSG level, but no clear impact can be noticed at the level of the biological noise. Additionally, no differences can be observed between single or two-compartment SDR. Normally, a higher degree of noise would be expected for the two-compartment setup considering the higher stochasticity at the level of the dissolved oxygen concentration profiles met at the single-cell level in this specific setup [40].

5 Concluding remarks

RSG can be used as an efficient metabolic biosensor related to the activity of the transport chain at the single-cell level. This staining procedure is effective for the detection of carbon limitation and dissolved oxygen limitation at the single-cell level.

Scale-down effect induced a decrease in the global RSG signal but had no significant effect of biological noise, which is surprising because an increase of the extrinsic component of noise under these fluctuating environmental conditions would have been expected. However, the global trend, that is, reduced noise level when mean RSG activity is increased, has been observed for all the experiments. In the same context, no differences were observed between single- and two-compartment SDR, suggesting that the impact of stochasticity at the level of the circulation path followed by the individual cells cannot be tracked on the basis of RSG.

RSG can thus be used as a generic marker for the estimation of the metabolic activity of different *E. coli* strains in different operating conditions, but its use as a single cell marker for the detection of microbial phenotypic heterogeneity has to be considered with care and should be complemented with alternative analysis (e.g., by using more specific fluorescent protein based biomarkers).

Practical application

It is known that isogenic microbial population is able to display phenotypic diversification upon environmental changes. In this study, we developed a high-throughput methodology based on the use of flow cytometry and the preliminary staining of the cells with Redox Sensor Green (RSG). We demonstrated that RSG is related to the activity of the electron transport chain and can be used as an efficient tracker of metabolic activity at the single-cell level in different bioreactor configurations. We showed that RSG can be efficiently used to detect carbon limitation and dissolved oxygen limitation in bioreactor. More specifically, our methodology was used in order to assess a potential relationship between bioreactor heterogeneity and microbial population heterogeneity. Unexpectedly, no such correlation was found based on scale-down analysis.

JB, FD, DT, and AD gratefully acknowledge the Belgian fund for scientific research (FNRS-FRS). JB and AD are supported by a PhD grant from FNRS-FRS (PDR project number 14730278). FD and ARL acknowledge the bilateral grant FRS-FNRS-CONACyT number 209227. The authors would like to thank Tine Suhr for expert technical assistance during the construction of the ATPase expressing strain.

The authors have declared no conflict of interest.

6 References

- [1] Enfors, S. O., Physiological responses to mixing in large scale bioreactors. *J. Biotechnol.* 2001, 85, 175–185.
- [2] Neubauer, P., Junne, S., Scale-down simulators for metabolic analysis of large-scale bioprocesses. *Curr. Opin. Biotechnol.* 2010, 21, 114–121.
- [3] Delvigne, F., Lejeune, A., Destain, J., Thonart, P., Modelling of the substrate heterogeneities experienced by a limited microbial population in scale-down and in large-scale bioreactors. *Chem. Eng. J.* 2006, 120, 157–167.
- [4] Lapin, A., Multi-scale spatio-temporal modeling: Lifelines of microorganisms in bioreactors and tracking molecules in cells. *Adv. Biochem. Eng. Biotechnol.* 2010, 121, 23–43.
- [5] Delvigne, F., Goffin, P., Microbial heterogeneity affects bioprocess robustness: Dynamic single cell analysis contribute to understanding microbial populations. *Biotechnol. J.* 2014, 9, 61–72.
- [6] Swain, P. S., Elowitz, M. B., Siggia, E. D., Intrinsic and extrinsic contributions to stochasticity in gene expression. *Proc. Natl. Acad. Sci. USA.* 2002, 99, 12795–12800.
- [7] Silva-Rocha, R., de Lorenzo, V., Noise and robustness in prokaryotic regulatory networks. *Annu. Rev. Microbiol.* 2010, 64, 257–275.
- [8] Shahrezaei, V., Swain, P. S., The stochastic nature of biochemical networks. *Curr. Opin. Biotechnol.* 2008, 19, 369–374.
- [9] Delvigne, F., Zune, Q., Lara, A. R., Al-Soud, W. et al., Metabolic variability in bioprocessing: Implications of microbial phenotypic heterogeneity. *Trends Biotechnol.* 2014, 32, 608–616.
- [10] Boulineau, S., Tostevin, F., Kiviet, D. J., ten Wolde, P. R. et al., Single-cell dynamics reveals sustained growth during diauxic shifts. *PLoS One* 2013, 8, e61686.
- [11] Solopova, A., van Gestel, J., Weissing, F. J., Bachmann, H. et al., Bet-hedging during bacterial diauxic shift. *Proc. Natl. Acad. Sci. USA* 2014, 111, 7427–7432.
- [12] Van Heerden, J. H., Lost in transition: Startup of glycolysis yields subpopulations of nongrowing cells. *Science* 2014, 343, 1–9.
- [13] Grunberger, A., Wiechert, W., Kohlheyer, D., Single-cell microfluidics: Opportunity for bioprocess development. *Curr. Opin. Biotechnol.* 2014, 29, 15–23.
- [14] Brognaux, A., Han, S., Sorensen, S. J., Lebeau, F. et al., A low-cost, multiplexable, automated flow cytometry procedure for the characterization of microbial stress dynamics in bioreactors. *Microb. Cell Fact.* 2013, 12, 553–563.

- [15] Polizzi, K. M., Kontoravdi, C., Genetically-encoded biosensors for monitoring cellular stress in bioprocessing. *Curr. Opin. Biotechnol.* 2014, 31, 50–56.
- [16] Zhang, J., Jensen, M. K., Keasling, J. D., Development of biosensors and their application in metabolic engineering. *Curr. Opin. Chem. Biol.* 2015, 28, 1–8.
- [17] Delvigne, F., Ingels, S., Boxus, M., Thonart, P., Bioreactor mixing efficiency modulates the activity of a *prpoS::GFP* reporter gene in *E. coli*. *Microb. Cell Fact.* 2009, 8, 1475–2859.
- [18] Cabantous, S., Terwilliger, T. C., Waldo, G. S., Protein tagging and detection with engineered self-assembling fragments of green fluorescent protein. *Nat. Biotechnol.* 2005, 23, 102–107.
- [19] Nikolic, N., Barner, T., Ackermann, M., Analysis of fluorescent reporters indicates heterogeneity in glucose uptake and utilization in clonal bacterial populations. *BMC Microbiol.* 2013, 13, 258.
- [20] Han, S., Delvigne, F., Brognaux, A., Charbon, G. E. et al., Design of growth-dependent biosensors based on destabilized GFP for the detection of physiological behavior of *Escherichia coli* in heterogeneous bioreactors. *Biotechnol. Prog.* 2013, 29, 553–563.
- [21] Hentschel, E., Will, C., Mustafi, N., Burkovski, A. et al., Destabilized eYFP variants for dynamic gene expression studies in *Corynebacterium glutamicum*. *Microb. Biotechnol.* 2013, 6, 196–201.
- [22] Müller, S., Origin and analysis of microbial population heterogeneity in bioprocesses. *Curr. Opin. Biotechnol.* 2010, 21, 100–113.
- [23] Konopka, M. C., Strovass, T. J., Ojala, D. S., Chistoserdova, L. et al., Respiration response imaging for real-time detection of microbial function at the single-cell level. *Appl. Env. Microbiol.* 2011, 77, 67–72.
- [24] Sabido, A., Martinez, L. M., de Anda, R., Martinez, A. et al., A novel plasmid vector designed for chromosomal gene integration and expression: Use for developing a genetically stable *Escherichia coli* melanin production strain. *Plasmid* 2013, 69, 16–23.
- [25] Dikshit, K. L., Orii, Y., Navani, N., Patel, S. et al., Site-directed mutagenesis of bacterial hemoglobin: The role of glutamine (E7) in oxygen-binding in the distal heme pocket. *Arch. Biochem. Biophys.* 1998, 349, 161–166.
- [26] Koeblmann, B. J., Westerhoff, H. V., Snoep, J. L., Nilsson, D. et al., The glycolytic flux in *Escherichia coli* is controlled by the demand for ATP. *J. Bacteriol.* 2002, 184, 3909–3916.
- [27] Pablos, T. E., Mora, E. M., Le Borgne, S., Ramirez, O. T. et al., Vitreoscilla hemoglobin expression in engineered *Escherichia coli*: Improved performance in high cell-density batch cultivations. *Biotechnol. J.* 2011, 6, 993–1002.
- [28] Pablos, T. E., Sigala, J. C., Le Borgne, S., Lara, A. R., Aerobic expression of Vitreoscilla hemoglobin efficiently reduces overflow metabolism in *Escherichia coli*. *Biotechnol. J.* 2014, 9, 791–799.
- [29] Frey, A. D., Kallio, P. T., Bacterial hemoglobins and flavohemoglobins: Versatile proteins and their impact on microbiology and biotechnology. *FEMS Microbiol. Rev.* 2003, 27, 525–545.
- [30] Holm, A. K., Blank, L. M., Oldiges, M., Schmid, A. et al., Metabolic and transcriptional response to cofactor perturbations in *Escherichia coli*. *J. Biol. Chem.* 2010, 285, 17498–17506.
- [31] Silander, O. K., Nikolic, N., Zaslaver, A., Bren, A. et al., A genome-wide analysis of promoter-mediated phenotypic noise in *Escherichia coli*. *PLoS Genet.* 2012, 8, e1002443.
- [32] Taniguchi, Y., Choi, P. J., Li, G. W., Chen, H. et al., Quantifying *E. coli* proteome and transcriptome with single-molecule sensitivity in single cells. *Science* 2010, 329, 533–538.
- [33] Bar-Even, A., Paulsson, J., Maheshri, N., Carmi, M. et al., Noise in protein expression scales with natural protein abundance. *Nat. Genet.* 2006, 38, 636–643.
- [34] Delvigne, F., Destain, J., Thonart, P., Structured mixing model for stirred bioreactor: An extension to the stochastic approach. *Chem. Eng. J.* 2005, 113, 1–12.
- [35] Henkel, S. G., Ter Beek, A., Steinsiek, S., Stagge, S. et al., Basic regulatory principles of *Escherichia coli*'s electron transport chain for varying oxygen conditions. *PLoS One* 2014, 9, e107640.
- [36] Delvigne, F., Baert, J., Gofflot, S., Lejeune, A. et al., Dynamic single-cell analysis of *Saccharomyces cerevisiae* under process perturbation: Comparison of different methods for monitoring the intensity of population heterogeneity. *J. Chem. Technol. Biotechnol.* 2015, 90, 314–323.
- [37] Newman, J. R. S., Ghaemmaghami, S., Ihmels, J., Breslow, D. K. et al., Single-cell proteomic analysis of *S. cerevisiae* reveals the architecture of biological noise. *Nature* 2006, 441, 840–846.
- [38] Baert, J., Kinet, R., Brognaux, A., Delepierre, A. et al., Delvigne F: Phenotypic variability in bioprocessing conditions can be tracked on the basis of on-line flow cytometry and fits to a scaling law. *Biotechnol. J.* 2015, 10, 1316–1325.
- [39] Liu, J., Francois, J. M., Capp, J.-P., Use of noise in gene expression as an experimental parameter to test phenotypic effects. *Yeast* 2016, 33, 209–216.
- [40] Delvigne, F., Destain, J., Thonart, P., A methodology for the design of scale-down bioreactors by the use of mixing and circulation stochastic models. *Biochem. Eng. J.* 2006, 28, 256–268.